




INSTALLATION INSTRUCTIONS FOR THE C6 CORVETTE REAR VIEW MIRROR



PIVOT SCREW

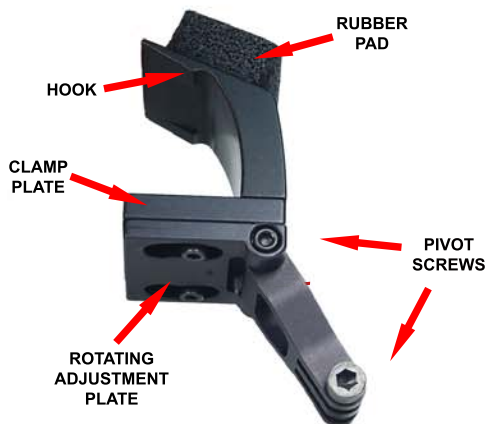

1 - Install your GoPro camera onto the Blendmount so you can observe how the mount functions.

2 - Observe the illustration above which identifies the components of the mount. Remove the arm by removing both pivot Screws.

3 - IMPORTANT- The two Clamp Screws are not accessible when the Rotating Adjustment Plate is installed. Before installing adjustment plate, tighten the clamp-plate onto the rearview mirror.



4 - This photo illustrates how the Hook fits into the recessed area behind the mirror. This is just a reference photo as you will not be able to see this during installation.

5 - Place the Windshield Pad onto the Silicone Pad. Position the mount as shown above. Compress the Silicone Pad into the Windshield Pad as you slide upwards into the recessed area behind the mirror. You will hear the Hook snap into place when it is positioned correctly.

6 - Tighten the two Clamp Screws (identified in fig. 3), alternating from one to the other every two or three revolutions. You will notice a little resistance once the Rubber Pad starts compressing against the bottom of the mirror. Make sure that both Clamp Screws are tight.



7 - Install the GoPro onto the mount, adjusting the large pivot screw to level the camera. You should hear it lock into position. After all adjustments are made, be sure to check that all adjustment screws are tight. Grab the long arm of the allen wrench to assure that these screws are securely tightened. If using the HERO 4 Session, rotate the camera so the power button is facing downward.

8 - The rotating adjustment plate should be aligned straight with the clamp plate so that the camera points straight forward.

CAUTION

DO NOT use this mount if it interferes with the adjustability or the operation of your rear view mirror in any way.

DO NOT use this mount if the radar detector creates an unsafe viewing obstruction.

DO NOT ATTEMPT TO MODIFY THIS PRODUCT. Consult the manufacturer for assistance.

All BlendMount products are accompanied with detailed installation instructions and adjustment tips. You are encouraged to contact customerser@blendmount.com or call J28 Design at 1-707-664-8234 for further assistance.

Your feedback is very important to us. Please email any questions or comments you have to customerservice@blendmount.com

